

Siemens optimizes gas turbine performance using LMS acoustic simulation software

Combustor acoustic simulation improves reliability of Siemens Power Generation Systems





Increasingly fierce competition driven by deregulation and privatization is dictating ever-lower power generation costs.

Reducing the cost per kilowatt

Increasingly fierce competition driven by deregulation and privatization is dictating ever-lower power generation costs. Cost cuts can be realized by establishing an economic plant operation centering on low investment and lifecycle costs. Maximum operating economy relies on optimum compression and combustion, pushing forward into new thermodynamic regions and higher combustion temperatures. One of the main challenges resides in reconciling competitive engine characteristics with strict environmental targets, including low carbon and nitrogen derivative emissions. In addition, customers also appreciate easy-serviceable designs and long intervals between major overhauls.

A phenomenon that potentially influences the reliability of power generation systems is the presence of thermo-acoustic oscillations in the combustion chamber. A can-annular type of combustion system, for example, typically counts 16 or more separate can-shaped combustion chambers, distributed on a circle perpendicular to the symmetry axis of the engine. In each of these cans, a burner continuously injects a mixture of fuel gas and compressed air in order to power the turbine and generate the requested electrical power.

The mentioned combustor oscillations are determined by a feedback cycle that combines the effects of fluid flow, heat transfer, thermal expansion and acoustic oscillations, a cocktail potentially causing severe engine malfunctions. Several test rigs and prototypes are constructed to test and evaluate a comprehensive number of characteristic conditions. The disadvantage of prototype testing is that it requires major resources and does not allow flexible investigations of all conditions. Therefore, the capability to predict thermo-acoustic instabilities is vitally important to increase the performance and to extend the reliability of gas turbine power plants.

A specific approach to combustor optimization

To develop specific measures that prevent thermo-acoustic instability, Siemens engineers analyze the complicated relationship and interaction between acoustic performance and thermal heat release. Sven Bethke, Engineer at Siemens Combustion Technology, explains, "Since eigenfrequencies and mode shapes of acoustic pressure are strongly coupled to the stability analysis, the Finite-Element (FE) mode analysis and the subsequent stability analysis are the main tasks in the thermo-acoustic prediction and

"Thermo-acoustic oscillations in the combustion chamber can cause severe reliability problems"

evaluation process. Siemens Power Generation selected LMS SYSNOISE as the key application for acoustic modeling and simulation, because of its widespread use and extensive acoustic simulation capabilities. In the combustion optimization process followed at Siemens, engineers take the output of Computational Fluid Dynamics (CFD) simulations, including steady-state flow velocity, temperature, and fluid properties, as input for acoustic simulations in LMS SYSNOISE. For these simulations, a scale of different acoustic models are used: an FE model of a single-can combustor configuration, an extended FE model that also includes the incoming flow path upstream the burner, turbine vanes, and exhaust passage, and a complete multi-can annular combustor setup. An important and inherent part of the acoustic FE modeling is the definition of specific boundary conditions, which are determined mathematically or experimentally. Siemens engineers validate the results from acoustic simulation using appropriate tests performed on specifically designed single-can test rigs.”

New advances in combustor acoustic FE modeling

The implications of defining boundaries on the FE analysis of a single-can configuration are investigated using LMS SYSNOISE. The FE model includes the whole combustion chamber starting at the head end plate and ending at the exit of the transition piece upstream the turbine inlet. The crucial regions

through the burner as well as through the termination at the exit of the combustion chamber are characterized by absorbent boundary conditions. The acoustic boundary condition at the exit of the burner, i.e. at the inlet into the combustion chamber, is represented by a specific impedance, which is quantified experimentally using an atmospheric test rig without combustion. At the exit of the combustion chamber, the guide vanes of the turbine – or a Vane Simulation Section (VSS) in case of test rigs – define the acoustic boundary condition. Sophisticated mathematical approaches are used to describe the flow field downstream these obstacles. Compared to the fluid flow behind the vanes, cylinders generate much more vortices, which affect the reflection of the exit boundary condition. The FE model obtained is suitable for analyzing the effects of different impedances, for example, from different types of burners and varying Mach-numbers (steady-state flow velocities). The acoustic simulations show that the burner type has a significant impact, while the flow velocity in the combustion chamber affects the mode shapes of the acoustic pressure only marginally.

When extending the FE model of a combustor test rig with a VSS – which replaces the vanes of the turbine stages – and a downstream exhaust discharge tube, it became clear that the Mach-number cannot be neglected. The presence of narrow passages causes the geometry’s acoustic properties to be influenced by the speed of the

flow. Siemens engineers determined the reflection coefficient of the VSS on the basis of the acoustic pressure distribution, obtained by FE simulations performed in LMS SYSNOISE. The extended FE model is particularly suited to determine the impedance of the boundary upstream the VSS and its dependency on the Mach-number through this section. The results showed a strong dependency on the Mach-number through the VSS.


Acoustic modes of a can annular combustor setup

To study can-can interactions, an FE analysis of a complete multi-can annular combustor configuration was performed. The annular manifold upstream the turbine inlet interconnects combustion chambers with adjacent units. The absorbent acoustic boundary conditions used to describe the burner and chamber exit areas were defined in the same way as for a single-can model. Simulations in LMS SYSNOISE show that, besides the axial modes along each single can combustion chamber, the complete can annular combustor configuration triggers a range of additional acoustic modes. It concerns pure azimuthal and mixed axial/azimuthal modes. Since there are no test rigs available for measuring the complete can annular combustor configuration, these modes are only predictable by performing acoustic simulations in LMS SYSNOISE. The main reason why Siemens performs these acoustic evaluations is to make sure all potentially hindering or obstructing

“The combination of virtual simulation and adequate experimental testing allows Siemens to efficiently simulate the impact of specific design modifications on the acoustic performance of gas turbines”

Sven Bethke - Siemens



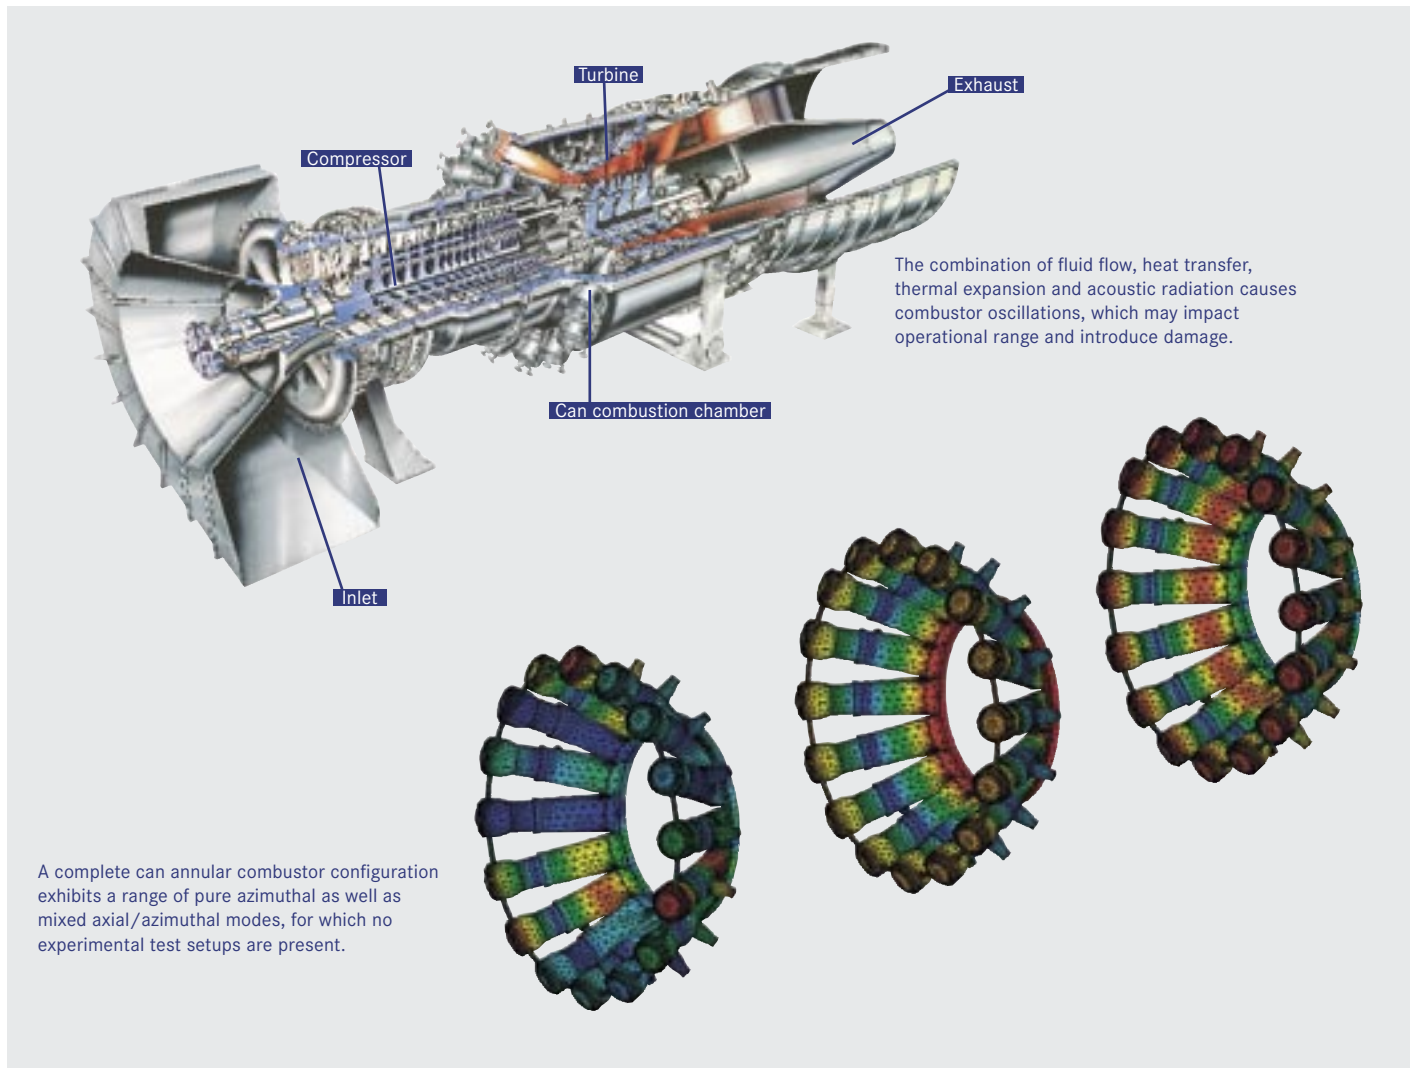

eigenfrequencies and acoustic velocities are known early on in the design and development process. This enables Siemens engineers to implement specific countermeasures to interfere disturbing eigenfrequencies, for example by developing and installing particular burner outlet extensions and acoustic resonators. The length of the extensions mounted on burner outlets defines the frequency that can excite the feedback cycle and, hence, decrease the risk for combustion instabilities. The installation of these extension units is a quite affordable solution that is particularly useful to suppress oscillations in the intermediate range of frequencies, typically between 50 and 500 Hertz. The sensitivity of these extensions makes this type of countermeasure harder to tune.

The use of acoustic resonators, which are part of the standard engine design is another way to influence acoustic eigenfrequencies. This approach is applied very efficiently to delete acoustic signals with shorter wavelengths, i.e. high frequencies between 1,000 and 3,000 Hertz. The geometry of these resonators can be designed in LMS SYSNOISE, but a practical way to avoid recurrent FE meshing is by estimating the geometry analytically and, finally, validating the design using LMS SYSNOISE. The cooling of these resonators prevents hot air from accessing the resonator. Resonators are very effective means, although further complexity, higher expenditure as well as reduced efficiency of the gas turbine due to the additional cooling air are disadvantageous. Although the

optimization of fluid flow, combustion and heat transfer remain primary objectives in gas turbine development, more attention is paid to the interrelations between acoustic performance and operation reliability and efficiency. Sven Bethke concludes, "The combination of virtual prototype simulations with LMS SYSNOISE and adequate experimental testing allows Siemens to efficiently simulate the impact of specific design modifications and operating conditions on the acoustic performance of gas turbines. The predicted acoustic eigenfrequencies and mode shapes of single combustion chambers and can-annular combustion systems are essential in optimizing combustor designs and increasing the competitive position of Siemens power generation systems." ■



LMS INTERNATIONAL

Researchpark Z1, Interleuvenlaan 68
B-3001 Leuven [Belgium]
T +32 16 384 200 | F +32 16 384 350
info@lms.be | www.lmsintl.com

LMS FRANCE	Paris T +33 1 69 35 19 20 info@lmsfrance.fr Lyon T +33 4 37 49 13 25
LMS DEUTSCHLAND	Leonberg T +49 7152 97 97 90 info@lms-gmbh.de
LMS ITALIANA	Novara T +39 0321 445 011 info@lms.it
LMS UK	Coventry T +44 24 7647 4700 info@lms-uk.co.uk
LMS N. AMERICA	Detroit T +1 248 952-5664 info@lmsna.com Los Angeles T +1 714 891-4205 Washington D.C. / Baltimore T +1 410 203-1200
LMS JAPAN	Yokohama T +81 45-478-4800 info@lms-ja.co.jp
LMS KOREA	Seoul T +82 2-571-7246 info@lmskorea.com
LMS CHINA	Beijing T +86 10 8497 6463 info@lmschina.com
LMS INDIA	Bangalore T +91 80 511 51 512 info.lmsindia@lms.be
LMS RUSSIA	Moscou T +7 095 937 84 93 info.lmsrussia@lms.be
LMS Test Division	Leuven [Belgium] T +32 16 384 200 info@lms.be Breda [The Netherlands] T +31 76 573 6363 Göttingen [Germany] T +49 551 50 48 50
LMS CAE Division	Leuven [Belgium] T +32 16 384 200 info@lms.be Kaiserslautern [Germany] T +49 631 30322 100 Coralville, IA [United States] T +1 319 626 6700
LMS Engineering Services Division	Leuven [Belgium] T +32 16 384 200 info@lms.be Kaiserslautern [Germany] T +49 631 30322 100 Detroit, MI [United States] T +1 248 952 5664 Torino [Italy] T +39 011 6671 615

Worldwide

For the address of your local representative, please visit www.lmsintl.com/lmsworldwide

LMS is an engineering innovation partner for companies in the automotive, aerospace and other advanced manufacturing industries. LMS enables its customers to get better products faster to market, and to turn superior process efficiency to their strategic competitive advantage. LMS offers a unique combination of virtual simulation software, testing systems and engineering services.

LMS is focused on the mission critical performance attributes in key manufacturing industries, including structural integrity, system dynamics, handling, safety, reliability, comfort and sound quality. Through our technology, people and over 25 years of experience, LMS has become the partner of choice for most of the leading discrete manufacturing companies worldwide.

LMS is certified to ISO9001:2000 quality standards and operates through a network of subsidiaries and representatives in key locations around the world.

